


Activated Carbon Pleat Panel Filter

FILTRATION GRADE **G3** **G4**

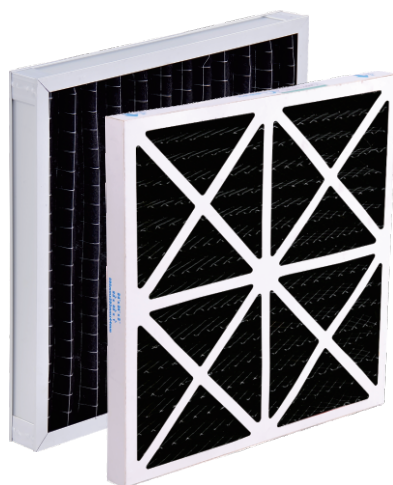

PRODUCT FEATURES

- ▶ The filter material is a composite of high-efficiency adsorption activated carbon fiber and filter cotton, covered with a metal mesh, and a temperature resistance of 80°C.
- ▶ With strong adsorption capacity, it can effectively filter dust, odors and organic pollutants in the air.
- ▶ Frame: paper frame, aluminum frame, galvanized frame
- ▶ It is widely used in various ventilation systems.

USING

- ▶ Pre-filtering of indoor air quality air conditioning systems, such as office buildings, hospitals, and airports. It can purify the malodorous substances in the air such as benzene, formaldehyde, ammonia and carbon dioxide, and can effectively remove pollution and clean the air.

TECHNICAL DATA

Filtration Grade	Size (mm) W x H x D	Initial Pressure Drop (Pa)	Final Pressure Drop (pa)	Rated Air Flow (m ³ /h)
G3	595 x 595 x 20	38	200	3000
	595 x 595 x 96	42	200	3400
	595 x 595 x 120	38	200	3400
G4	595 x 595 x 20	45	260	2800
	595 x 595 x 96	50	260	3400
	595 x 595 x 120	45	260	3400

★ Data may change without notice. Other specifications and thickness are available on request.

