

Ceiling Filter Media S-560G

FILTRATION GRADE **M5**



PRODUCT FEATURES

- ▶ Multi-layer structure immersed with glue on the surface, fabric mesh is on the air outlet surface.
- ▶ With the adhesive infiltrates the media, the dust particles are blocked. Thus the air flow is completely filtered and spread evenly which forming laminar flow state to achieve the best spraying effect.
- ▶ Comply with Flame Retardency classification standards DIN53438-F1, UL900-Class2.

USING


- ▶ It is mostly used in the spraying industry, such as spray paint systems and spray paint workshops. Also used in ventilation systems and equipment for electronics, chemicals, medicine, food, mineral processing, smelting industry.

TECHNICAL DATA


Graph of Weight Efficiency, Resistance and dust generation



Resistance-Wind Velocity Curve

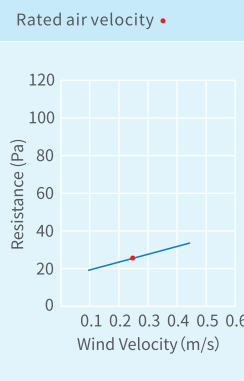

Under the condition of final pressure drop of 300 Pa Average Grading Efficiency Curve

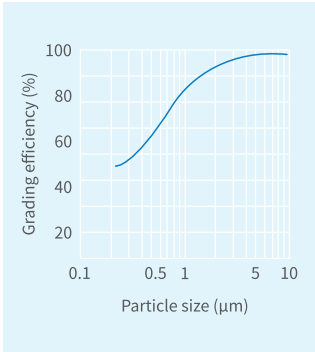

Material	100%POLYESTER FIBRES
Model	S-560G
Thickness (mm)	20±3
Dust Holding Capacity (g/m²)	380
Max Operating Temperature (°C)	120
Filtration Grade	M5

Weight (g/m²)	560
Testing Wind Velocity (m/s)	0.25
Rated Air Flow (m³/h)	900
Initial Prssure Drop (Pa)	25
Final Prssure Drop (Pa)	300
Average Weight Efficiency	94%

★ Data may change without notice. Other specifications and thickness are available on request.